

Power-Over-Ethernet Module



WINCHEN ELECTRONICS



2. Scope of application

- □ Video and VoIP Phone
- □ RFID Reader
- Multiband Access Point
- □ Surveillance camera

1.Product characteristics


- Compliance with IEEE802.3af standard.
- 38V~57V wide operating voltage range.
- Maximum output power up to 13W; Rated output: 12V/1.1A.
- The output ripple is less than 150 mV.
- Conversion efficiency can be as high as 87% (input: 48V output)12V@1.1A).
- With over current short circuit under voltage surge and other excellent reliability and circuit protection.
- PCBA standard size: 51mm*14mm*13mm
- ●Input/Output: isolate 1500Vdc.
- High reliability: The design meets the 5 million hour average failure interval.

3.describe

- The module is designed to extract power from conventional Class 5 Ethernet cable twisted pairs and meets the IEEE 802.3af Power-Ethernet (PoE) standard.At the same time, the module allows the power supply category to select "Intermediate Overlap" and "End Overlap" power supply without distinguishing polarity.
- ➤ Based on the IEEE 802.3af standard, this paper establishes information connection about the connection status, device type, power consumption level of the receiving device PD, and then applies power supply to port compatible devices based on PSE to power the PD through ethernet.
- This module DC/DC converter works in a wide input voltage range and low ripple low noise output. The DC/DC converter also has built-in output overload, output short circuit and overtemperature protection, and provides a 1500Vdc (input/output) electrical isolation.



4. Mechanical dimensions

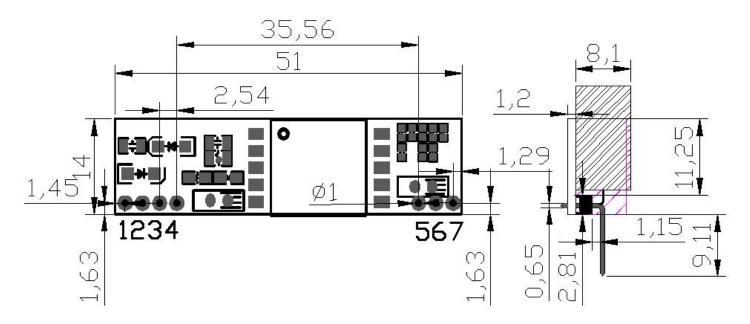

Company (mm)

All the above dimensional errors: (± 0.3)

5. pin definition

Pin	Name	describe
1	VA1	This input pin is used in conjunction with VA1 and connects to the centre tap of the transformer connected to pins 1& 2 of the RJ45 connector (RX) - it is not polarity sensitive.
2	VA2	This input pin is used in conjunction with VA2 and connects to the centre tap of the transformer connected to pins 3& 6 of the RJ45 connector (TX) - it is not polarity sensitive.
3	VB1	This input pin is used in conjunction with VB1 and connects to pin 4 & 5 of the RJ45 connector - it is not polarity sensitive.
4	VB2	This input pin is used in conjunction with VB2and connects to pin 7 & 8 of the RJ45 connector - it is not polarity sensitive.
5	Vout-	is the negative output of the PD.
6	Vout+	is the positive output of the PD.
7	NC	Position the reserved pin.



6. Electrical characteristics

6.1 Absolute maximum rating parameter

No	parameter	Symbol	MIN	MAX	Units
1	DC Voltage	Vcc	38	57	V
2	DC Voltage Surge 1ms	VSURGE	-0.6	80	V
3	ambient temperature	Ts	-40	80	°C

^{*}Exceeding the above rating may cause permanent damage to the product. Functional operations under these conditions are not recommended.

6.2 Recommended working conditions

No	parameter	Symbol	MIN	ТҮР	MAX	Units
1	input voltage	VIN	38	48	57	V
2	Low Voltage Lock	VLOCK	-	-	37	٧
3	working temperature	ТОР	-40	25	80	°C

^{*}Applicable only to WC-PD13C012A maximum operating temperature.

6.3 DC Characteristic

No	parameter	Symbol	MIN	ТҮР	MAX	Units	Test Opinions
1	Standard Output Voltage	VDC	11.7	12	12.3	V	VIN=48v
2	Output Current (VIN=48V)	PWR	-	1.1	1.8	А	Wide voltage input 38-57V
3	Power adjustment rate	VLINE	-	0.1	-	%	@50% Load
4	Load Adjustment Rate	VLOAD	-	1	-	%	@V _{IN} =48V
5	Ripple Output Noise	VRN	-	150	200	mVp-p	@Maximum Load
6	Minimum Load	RLOAD	10	-	-	mA	
7	Short circuit duration	Tsc	-	-	∞	sec	
8	Efficiency (load 80%)	EFF	82	87	-	%	
9	Isolation Voltage (I/O)	VISO	-	-	1500	V PK	
10	temperature coefficient	Тс	-	0.02		%	Per °C
11	dynamic response	Ts	-	60	100	ms	输入=48V 输出 =max

^{1:} Typical number is 25 C, nominal voltage is 48V, for auxiliary design only.

^{2:} Output ripple and noise can be reduced by an external filter, see the application instructions.


^{3:} If operated under the specified minimum load, the module emits audible noise and may cause PSE malfunction.



7. Functional Descriptions


7.1 input

WC-PD13C012A input end with bridge stack ensures input polarity protection, user can choose the connection mode as needed.

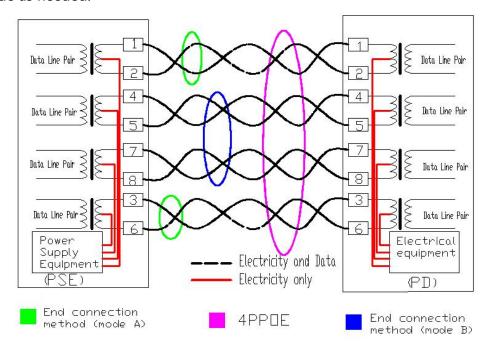

7.2 PD Signature

When the module is connected to the cable, it will automatically provide the Power Device (PD) signature to the PSE when needed. The PSE recognizes that the PD is connected to that line and provides power

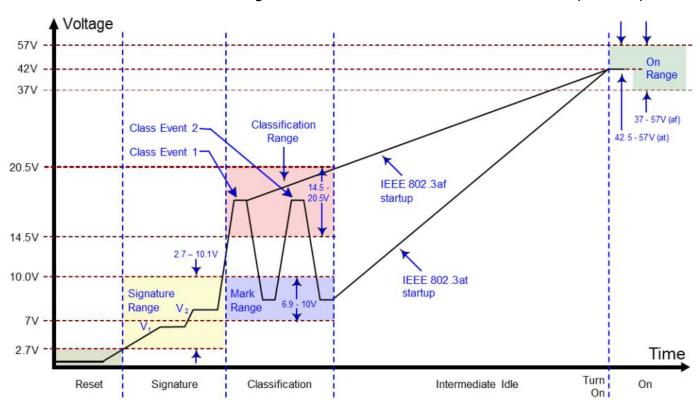




7.3 Power Classification

WC-PD13C012A uses IEEE802.3af standard and runs with Class 3 (13W) power rating by default.

Define criteria	Cable requirements	Grading parameters	Power Supply Characteristics	
			The DC voltage ranges from 42 to 57V, with a typical value of 48V.	
IEEE802.3at (POE Plus)	CAT5 cable or CAT6 cable	Maximum power required for Class4 devices is 13W~25.5W	Typical operating current is 10~600mA; typical output power: 30W;	
			Class4 rating supported by electrical equipment	
	CAT5 cable	Maximum power required for Class0 devices is 0~12.95W	The DC voltage ranges from 38 to 57V, with a typical value of 48V.	
IEEE802.3af		The maximum power required for Class1 devices is 0~3.84W	Typical operating current is 10~350mA; typical output power: 15.4W;	
(POE)		The maximum power required for Class2 devices is 3.85W~6.49W	The overload detection current is 350~500mA.	
		The maximum power required for Class3 devices is 6.5W~12.95W	Provide 4 Class Power Requests for PD Devices ranging from 3.84 to 12.95W	

7.5 Typical schematic diagram






8. PoE Product naming rules



9. Typical applications


This module is used in PSE network cable to convert electric energy to DC-DC to the required voltage of equipment without affecting data signal transmission. It conforms to ieee802.3af standard and is used by all equipment terminals

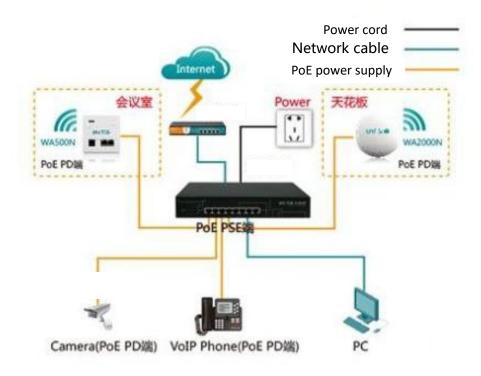


WINCHEN


10. Test waveform diagram

Typical features: Vout=12

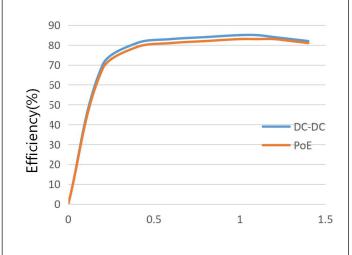


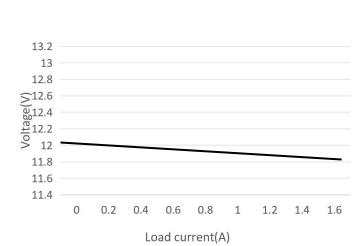


Efficiency (Vout = 12 V)




Output voltage (input 48V)

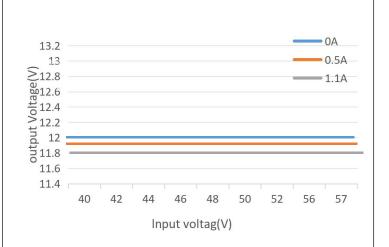

Maximum temperature of components Conditions (ambient temperature: 27 °C; output power: 12V / 1.1A; frequency: 3H)

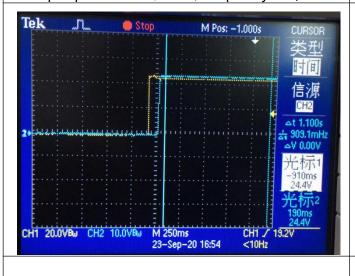


Input voltage & output voltage

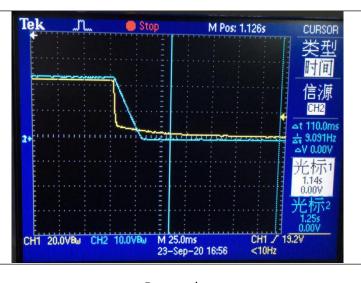


Power down

Power on




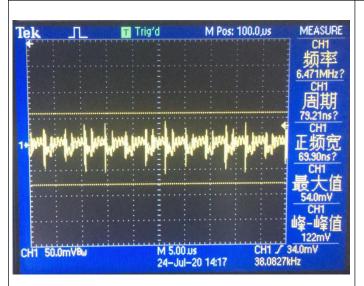




Noise (VIN = 42V, IO = 1.1A, 5 ~ 20MHz bandwidth)


Output response & load (12V / 0.01A)

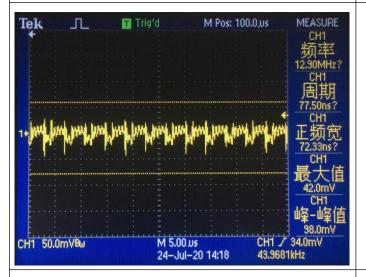




Noise (VIN = 48V, IO = 1.1A, $5 \sim 20$ MHz bandwidth)

Output response & load (12V / 0.5A)



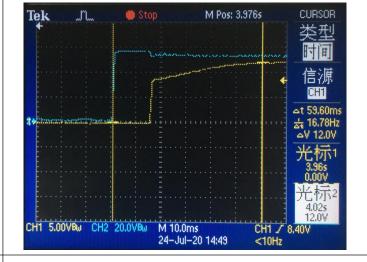

Noise (VIN = 57V, IO = 1.1A, $5 \sim 20$ MHz bandwidth)

Output response & load (12V / 1.1A)

^{*}Output parallel 10uF / 100nF capacitor is beneficial to suppress ripple